




OAR-TP OPEN AIR SENSE RESISTORS

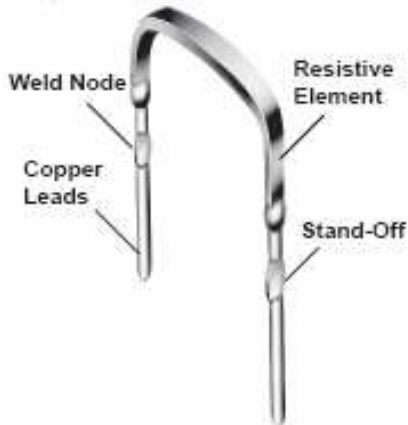

特点 Features


- 功率 1, 3, 5W
- 精度±1% 或 ±5%(低于 5mΩ 为 2%)
- 电阻线电阻温度系数±20ppm/°C
- 无铅引线可加工为所需的结构
- 阻燃性
- 电感小于 10nh

用途 Applications

电流传感器
反馈电路
低电感线圈
震荡和脉冲电路

规格说明 Specifications

Type	Power Rating W	Available Resistance Ω
OAR-1TP	1W@85°C	0.003Ω — 0.10Ω
OAR-3TP	3W@85°C	0.0025Ω — 0.10Ω

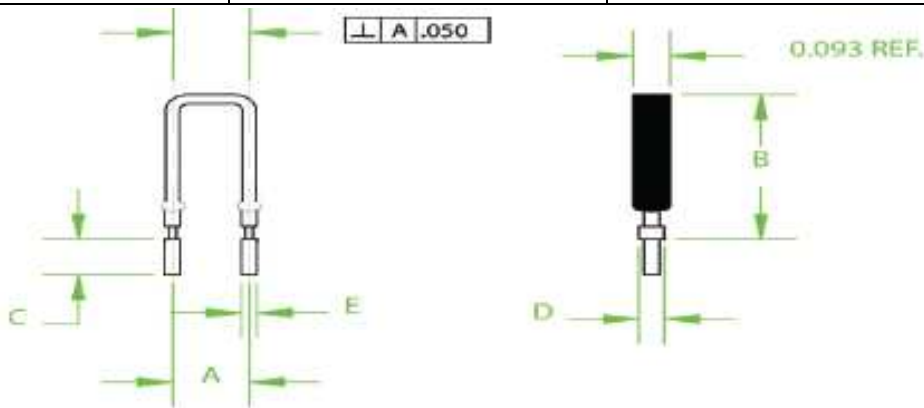

尺寸 Dimensions

Type	ResistanceΩ	A mm	B mm	C mm	E mm	F mm
OAR-1TP	0.003-0.10	7.0+1.0/-0.8	7.8	5.08±2.54	1.65+0.25/-0.13	1.02±0.051
OAR-3TP	<0.005	7.0+1.0/-0.8	32	5.08±2.54	1.65+0.25/-0.13	1.02±0.051
	0.005-0.10	5.0+1.0/-0.8	32	5.08±2.54	1.65+0.25/-0.13	1.02±0.051